

08/21/00  
JC810 U.S. PTO

8-22-00

A

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Sismondi et al.  
Serial No. New Filing  
Filed: August 21, 2000 Docket No. 01006US01  
Title: INK-JET PRINTING RECEIVING SHEET COMPRISING GELATIN AND A METAL SALT

JC777 U.S. PTO  
09/643026  
08/21/00

Box PATENT APPLICATION  
Assistant Commissioner for Patents  
Washington, D.C. 20231

- ☒ Patent application including 21 pages of specification, 9 claims and 1 page of abstract
- ☒ Signed Declaration and Power of Attorney in Italian and English
- ☒ Assignment to Ferrania, S.p.A.
- ☒ Assignment Recordation Cover Sheet
- ☒ Priority Document, The Certified Italian Patent Application, Serial Number: SV99A000029
- ☒ Translation of the Italian Certificate of Copy Authentication for Patent Application S.N. SV99A000029
- ☒ Transmittal Sheet
- ☒ Return postcard

CLAIMS FILED					
	Total Claims	In Excess of	Extra Claims Present	Rate	Fees
Basic Filing Fee					\$ 690.00
Total Claims	9	20	0	X \$18.00	\$ 0.00
Indep. Claims	1	3	0	X \$78.00	\$ 0.00
Multiply Dependent Claims					\$ 0.00
TOTAL FEES					\$ 690.00

Authorization is hereby given to charge the above application fees and any additional fees or credit any overpayments that may be deemed necessary to Deposit Account Number 50-1391.

MARK A. LITMAN & ASSOCIATES, P.A.  
York Business Center, Suite 205, 3209 W. 76<sup>th</sup> St.  
Edina, MN 55402 (952-832-9090)

By: Mark A. Litman  
Atty: Mark A. Litman  
Reg. No. 26,390

CERTIFICATE UNDER 37 C.F.R. 1.10:  
'Express Mail' mailing number: EL703681528US  
Date of Deposit: August 21, 2000  
The undersigned hereby certifies that this Transmittal Letter and the paper or fee, as described herein, are being deposited with the United States Postal Service 'Express Mail Post Office To Addressee' service under 37 CFR 1.10 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231  
By: Mark A. Litman  
Mark A. Litman

## **Ink-Jet Printing Receiving Sheet Comprising Gelatin And A Metal Salt**

### **FIELD OF THE INVENTION**

5       The invention relates to an ink receptor for ink jet printers, and more particularly, to an ink receptor containing a combination of gelatin, as a binder, and salts of a metal selected from the IIA or IIB groups of the periodic table of elements or complexes which comprise said metal salts as additives to improve post printed drop sweating after stressed aging in the resulting image, still maintaining a good glossi-  
10   ness.

### **BACKGROUND OF THE INVENTION**

15       Ink jet printing is becoming increasingly popular, particularly for so-called "desk-top publishing", because of its capability to produce small volumes of printed matter from digital input at high throughput speeds. Recent equipment developments have led to the introduction of multi-color ink jet printers that integrate colored graphics and text. To some extent, however, the applications of ink jet printing have been limited due to the demanding requirements the ink receptors must meet in order  
20   to provide high quality text and graphics.

      It is desirable that receiving media for inkjet printing are capable of absorbing significant amounts of liquid to ensure that the surface of said receptors be dry and non tacky to the touch after printing; but it is also desirable to maintain durability of printing image.

25       In case of multicolor ink-jet receptors, the ink-receiving layer is often subjected to multiple print, one for each primary color (yellow, magenta and cyan). During the first or second print, the amount of organic compounds absorbed in the layer can be partially desorbed creating on the image surface a local organic compound concentration that are visible as drop. Where a yellow ink is absorbed by the  
30   ink receiving layer after cyan and magenta inks have been already absorbed therein, it

is possible to have the formation of yellow colored drops in specific areas on the surface of the receiving layer, areas that have been saturated with cyan and magenta inks and that are no more able to properly absorb additional inks. This problem is generally known as post printed drop sweating.

5           PCT Patent Application 99-06,219 describes a composition useful for surface treating a substrate for ink jet printing comprising a salt of a divalent metal being soluble in an aqueous medium at about pH 7 to about pH 9, further comprising a carrier agent and a sizing agent. Indicia printed thereon will have improved print quality characteristics.

10           European Patent Application 928,841 discloses an ink/media combination, in which the ink comprises an aqueous medium, a colorant and an alginic acid salt selected from the group consisting of monovalent ion salts and organic amine salts and in which the media, preferably a textile, treated with a specific water soluble salt of a metal having a valence of at least 2 produce printed chromatic images with improved  
15           bleed characteristics and sharper edges.

          US Patent 4,649,064 discloses a rapid-drying image-recording element adapted for water-based liquid ink marking, in devices such as pen plotters, ink jet printers and the like, comprising a support having thereon a hydrophilic ink-receiving layer which is cross-linked to a degree sufficient to render it non-blocking and waterfast  
20           while permitting it to rapidly absorb a water-based liquid ink. The element is utilized in combination with a water-based liquid ink that comprises a water-dispersible cross-linkable colorant/resin composition and the ink-receiving layer contains a cross-linking agent which cross-links the colorant/resin composition, thereby rendering the ink markings smear-resistant, abrasion-resistant and waterfast.

25           US Patent No. 4,554,181 describes an ink jet receiving sheet having a receiving surface which includes a combination of a water soluble polyvalent metal salt and a cationic polymer, said polymer having cationic groups which are available in the receiving surface for ionically interacting with an anionic dye and insolubilizing it. Good water fastness is obtained.

JP Patent Application 59-096,988 discloses a receiving material comprising a substrate coated with layer containing a pigment, a binder and a water-soluble salt of metal having valency of at least 2 as waterproofing agent. The pigment is, for example,  $\text{CaCO}_3$ ,  $\text{BaSO}_4$ ,  $\text{TiO}_2$ , and the like; the binder is, for example, oxidized starch, polyvinyl acetate latex, and the like. Decolorization or smearing of color on wetting is prevented. The water-soluble salt of metal makes color waterproof without changing the hue and improves color stability.

JP Patent Application 59-078,885 discloses an ink-jet receiving sheet having a degree of sizing of 20 seconds or less, a surface pH value between 5 and 10 and containing at least one halide, sulphate or nitrate of magnesium or calcium at a coverage of 0.1-15  $\text{g/m}^2$ . The receiving sheet has a better water resistance but does not lower the colour tone of dye.

US Patent 4,740,420 discloses a receiving medium for ink-jet printing comprising a support material containing at least in the surface portion thereof a water-soluble metal salt with the ion valence of the metal being 2 to 4 and a cationic organic material selected from the group consisting of alkylamine salts, quaternary ammonium salts and polyamines to improve water resistance of the printed images.

EP Patent Application 705,172 describes a receiving sheet for ink jet printing comprising a support having coated thereon one or more layers receptive for aqueous inks, said receiving sheet being characterized in that the coating comprises at least one trivalent salt of a metal of the Group IIIb of the periodic table of elements to improve water resistance. The preferred metal used in the trivalent salt is lanthanum.

Thus, there is a need for improved ink receptors that have minimum post printed drop sweating after stressed ageing, still maintaining a good glossiness.

## SUMMARY OF THE INVENTION

The ink jet receiving sheet of the invention has a surface pH value of less than 5.0 and comprises a support and at least a receiving layer containing a binder selected from the group consisting of gelatin and gelatin derivatives, and at least a salt of a

metal selected from the IIA or IIB groups of the periodic table of elements or complexes which comprise said metal salts as additives to improve the post printed drop sweating after stressed ageing, still maintaining a good glossiness.

5

## DETAILED DESCRIPTION OF THE INVENTION

A first essential element of the ink jet receiving sheet according to the present invention is the use of gelatin or gelatin derivatives as binder component of the ink receiving layer(s).

10

Any gelatin made from animal collagen can be used, but gelatin made from pig skin, cow skin or bone collagen is preferable. The kind of gelatin is not specifically limited, but lime-processed gelatin, acid-processed gelatin, inactivated amino group gelatin (such as acetylated gelatin, phthaloylated gelatin, malenoylated gelatin, benzoylated gelatin, succinoylated gelatin, methyl urea gelatin, phenylcarbamoylated gelatin, and carboxy modified gelatin), or gelatin derivatives (for example, gelatin derivatives disclosed in JP Patents 38-4854/1962, 39-5514/1964, 40-12237/1965, 42-26345/1967 and 2-13595/1990, US patents 2,525,753, 2,594,293, 2,614,928, 2,763,639, 3,118,766, 3,132,945, 3,186,846 and 3,312,553 and GB patents 861,414 and 103,189) can be used singly or in combination.

15

20

The gelatin binder ordinarily makes up from 30 to 90 weight % and preferably 50 to 80 weight % based on the solid content of the ink receiving layer compositions. Preferably, the ink receiving layers totally comprise a binder amount of from 1 to 20 g/m<sup>2</sup>, and more preferably from 2 to 10 g/m<sup>2</sup>.

25

The second essential element according to the present invention is the use in the ink receiving layer(s) of at least a salt of metal selected from the IIA or IIB groups of the periodic table of elements or complexes which comprise salts of metal selected from the IIA or IIB groups of the periodic table of elements as additive to improve the post printed drop sweating after stressed ageing. Preferred bivalent metals that can be used in the present invention include magnesium, calcium, barium and zinc. The most useful salts include salts of mineral acids and salts of organic acids. Preferred types of

30

salts which can be used include nitrates, sulfates, and chlorides. Preferred metal salts to be used in the present invention are magnesium sulfate, magnesium nitrate, calcium sulfate, calcium nitrate, zinc sulfate, zinc nitrate and barium chloride.

The proportions of the ingredients making up the coating compositions which form the ink-receiving layer can be widely varied to meet the requirements of the particular element involved. Typically, the resulting ink receiving layers totally comprise an amount of metal salts in the range from 0.05 to 2.0 g/m<sup>2</sup>, preferably from 0.1 to 1.0 g/m<sup>2</sup>. When preparing the ink jet receiving sheet by coating a plurality of ink receiving layers, the metal salts are added to the two ink receiving layers nearest to the support in an amount ranging from 0.025 to 1.0 g/m<sup>2</sup> for each layer.

The resulting ink receiving layers totally comprise a gelatin/metal salts ratio in the range from 2:1 to 200:1, preferably from 5:1 to 50:1.

The ink receiving layer(s) may also contain a glossiness improving agent represented by monosaccharides and/or oligosaccharides and/or polysaccharides having a recurring unit comprising five or six carbon atoms. Said saccharides can be hydrogenated or non-hydrogenated. Preferred recurring units include, for example, glucose, xylose, mannose, arabinose, galactose, sorbose, fructose, fucose, adonitol, arbutol, inositol, xylitol, dulcitol, iditol, lactitol, mannitol, sorbitol, and the like. The average molecular weight of said saccharides ranges from 1,000 to 500,000, preferably from 1,000 to 30,000.

Hydrogenated and non-hydrogenated saccharides useful in the present invention are commercially available, for example, under the trade designation POLYSORB<sup>TM</sup> or GLUCIDEX<sup>TM</sup>, from Roquette, Lille, France. The preparation of hydrogenated and non-hydrogenated saccharides usually starts from natural products (like starch, agar, tragacanth gum, xanthan gum, guar gum, and the like) by means of enzymatic processes (to reduce the average molecular weight) and of reducing processes (to saturate the molecule, in case of hydrogenated saccharides).

The above-described glossiness improving agents ordinarily make up to 30 weight % and preferably up to 20 weight % based on the solid content of the ink receiving layer compositions. Preferably, the resulting ink receiving layers totally com-

prise a glossiness improving agent amount of from 0.1 to 5 g/m<sup>2</sup>, preferably from 0.5 to 3 g/m<sup>2</sup>.

The support used in the ink jet receiving sheet of the invention includes any conventional support for ink jet receiving sheet. A transparent or opaque support can  
5 be used according to the final use of the ink jet receiving sheet. Useful examples of transparent supports include films of polyester resins, cellulose acetate resins, acryl resins, polycarbonate resins, polyvinyl chloride resins, poly(vinylacetal) resins, poly-ether resins, polysulfonamide resins, polyamide resins, polyimide resins, cellophane or celluloid and a glass plate. The thickness of the transparent support is preferably  
10 from 10 to 200  $\mu$ m. Useful examples of opaque supports include paper, coat paper, synthetic paper, resin-covered paper, and pigment-containing opaque films, but synthetic paper, a resin-covered paper or various films are preferable in view of glossi-ness or smoothness, and resin-covered paper or polyester film are preferable in view of touchiness or luxuriousness.

15 The base paper constituting the resin-covered paper useful in the invention is not specifically limited, and any paper can be used, but a smooth paper used as a con-ventional photographic support is preferable. The pulp used for the preparation of the base paper, singly or in admixture, is constituted by natural pulp, reproduction pulp, chemical pulp such as hardwood bleached kraft pulp, softwood bleached kraft pulp,  
20 high yield pulps such as groundwood pulp or thermo-mechanical pulp, recycled pulps and non-wood pulps such as cotton pulp or synthetic pulp. These base papers may contain additives usually employed in paper manufacture such as sizing agents, bind-ers, fixing agents, yield-improving agents, cationated agents, paper stiffness enhanc-ing agents, reinforcing agents, fillers, anti-static agents, fluorescent brightening agents  
25 or dyes. A surface sizing agent, a surface reinforcing agent, a fluorescent brightening agent, an antistatic agent and an anchoring agent may be coated on the surface of the material.

The thickness of the base paper is not specifically limited, but preferably ranges from 10 to 200  $\mu$ m. A base paper having a smooth surface is preferred; it is  
30 obtained by applying a pressure to or calendering the paper, during or after papering.

The weight of the base paper is preferably from 30 to 250 g/m<sup>2</sup>. The resin used in the manufacturing of resin-covered paper is preferably a polyolefin resin or a resin capable of being hardened with an electron beam. The polyolefin resin includes an olefin homopolymer such as a low density polyethylene, a high density polyethylene, polypropylene or polypentene, an olefin copolymer such as ethylene-propylene copolymer or mixtures thereof, each having various densities or melt viscosity indexes (melt index). These resins can be used singly or in combination.

The resin used to prepare the resin-covered paper preferably contains various additives, for example, white pigments such as titanium oxide, zinc oxide, talc or calcium carbonate, a fatty acid amide such as stearic acid amide or arachidic acid amide, a fatty acid metal salt such as zinc stearate, calcium stearate, aluminum stearate or magnesium stearate, an anti-oxidant such as *Irganox*<sup>TM</sup> 1010 or *Irganox*<sup>TM</sup> 1076, blue pigments or dyes such as cobalt blue, ultramarine, or phthalocyanide blue, magenta pigments or dyes such as cobalt violet, fast violet or manganese violet, a brightening agent and a UV absorber. These additives can be suitably used in combination.

The resin-covered paper, which is the support preferably used in the present invention, is manufactured by the so-called extrusion method, casting a thermally fused resin (for example, fused polyolefin) on the moving paper, whereby both surfaces of the paper are covered with the resin. When the paper is covered with a resin capable of being hardened with electron beam irradiation, the resin is coated with a conventional coater such as a gravure coater or a blade coater and then is irradiated with an electron beam to harden the coated resin. Before the paper is coated with a resin, the surface of the paper is preferably subjected to activation treatments such as a corona discharge or flame treatment. The surface of the support on the ink receiving layer side is glossy or matted depending upon its usage, but glossy surface is preferable. The back side of the support is not necessarily covered with resin, but this is preferably done to prevent curling. The back surface of a support is ordinarily non-glossy, but this one or both surfaces of the support are optionally subjected to activation treatments, such as a corona discharge or flame treatment. The thickness of a covered resin is not specifically limited, but is ordinarily from 5 to 50 µm.



A subbing or primer layer may be provided to improve the adhesion between the film support and the ink receiving layer(s). Useful subbing layers for this purpose are widely known in the photographic art and include, for example, polymers of vinylidene chloride such as vinylidene chloride/acrylonitrile/acrylic acid or vinylidene chloride/methyl acrylate/itaconic acid terpolymers, gelatin, gelatin derivatives, caseine, caseine derivatives.

In addition to the above mentioned ingredients, the ink receiving layer(s) can comprise several adjuvants dispersed therein. Useful adjuvants are represented by fillers, surfactants, mordants, matting agents, hardeners, plasticizers, and the like.

Organic and inorganic particles can be used as fillers. Useful examples of fillers are represented by silica (colloidal silica), alumina or alumina hydrate (aluminazol, colloidal alumina, a cation aluminum oxide or its hydrate and pseudo-boehmite), a surface-processed cation colloidal silica, aluminum silicate, magnesium silicate, magnesium carbonate, titanium dioxide, zinc oxide, calcium carbonate, kaoline, talc, clay, zinc carbonate, satin white, diatomaceous earth, synthetic amorphous silica, aluminum hydroxide, lithopone, zeolite, magnesium hydroxide and synthetic mica. Among these inorganic pigments, porous inorganic pigments are preferable, such as porous synthetic silica, porous calcium carbonate and porous alumina.

Useful examples of organic fillers are represented by polystyrene, polymethacrylate, polymethylmethacrylate, elastomers, ethylenevinyl-acetate copolymers, polyesters, polyester copolymers, polyacrylates, polyvinylethers, polyamides, polyolefines, polysilicones, guanamine resins, polytetrafluoroethylene, elastomeric styrene-butadiene rubber (SBR), urea resins, urea-formalin resins. Such organic fillers may be used in combination, and/or in place of the above-mentioned inorganic fillers.

The above mentioned fillers are added to the ink receiving layer(s) in an amount of from 0.1 to 5 g/m<sup>2</sup>, preferably from 0.2 to 3 g/m<sup>2</sup>, most preferably from 0.3 to 1 g/m<sup>2</sup>.

Preferred examples of the surfactants include anionic surfactants, amphoteric surfactants, cationic surfactants, and nonionic surfactants.

Examples of the anionic surfactants include alkylsulfocarboxylates,  $\alpha$ -olefin sulfonates, polyoxyethylene alkyl ether acetates, N-acyl amino acid and salts thereof, N-acyl methylaurine salts, alkylsulfate, polyoxy alkyl ether sulfates, polyoxyethylene alkyl ether phosphates, rosin soap, castor oil sulfate, lauryl alcohol sulfate, alkylphenol phosphates, alkyl phosphates, alkyl allyl sulfonates, diethylsulfosuccinate, diethylhexylsulfosuccinate, and dioctylsulfosuccinate.

Examples of the cationic surfactants include 2-vinylpyridine derivatives and poly-4-vinylpyridine derivatives.

Examples of the amphoteric surfactants include lauryl dimethyl aminoacetic acid betaine, 2-alkyl-N-carboxymethyl-N-hydroxyethyl imidazolinium betaine, propyldimethylaminoacetic acid betaine, polyoctyl polyaminoethyl glycine, and imidazoline derivatives.

Examples of non-ionic surfactants include non-ionic fluorinated surfactants and non-ionic hydrocarbon surfactants. Useful examples of non-ionic hydrocarbon surfactants include ethers, such as polyoxyethylene nonyl phenyl ether, polyoxyethylene octyl phenyl ether, polyoxyethylene dodecyl phenyl ether, polyoxyethylene alkyl allyl ethers, polyoxyethylene oleyl ether, polyoxyethylene lauryl ether, polyoxyethylene alkyl ethers, polyoxyalkylene alkyl ethers; esters, such as polyoxyethylene oleate, polyoxyethylene distearate, sorbitan laurate, sorbitan monostearate, sorbitan monooleate, sorbitan sesquioleate, polyoxyethylene monooleate, and polyoxyethylene stearate; and glycol surfactants. Specific examples of nonionic surfactants include octylphenoxy polyethoxy ethanols, such as *Triton*<sup>TM</sup> X-100, X-114, and X-405, available from Union Carbide Co., Danbury, Conn.; acetylenic diols such as 2,4,7,9-tetramethyl-5-decyn-4,7-diol and the like, such as *Surfynol*<sup>TM</sup> GA and *Surfynol*<sup>TM</sup> CT-136, available from Air Products & Chemicals Co., Allentown, Pa., trimethyl nonylpolyethylene-glycol ethers, such as *Tergitol*<sup>TM</sup> TMN-10 (containing 10 oxyethylene units, believed to be of the formula  $C_{12}H_{25}O(C_2H_4O)_5H$ ), available from Union Carbide Co., Danbury, Conn.; non-ionic esters of ethylene oxide, such as *Merpol*<sup>TM</sup> SH (believed to be of the formula  $CH_3(CH_2)_{12}(OC_2H_4)_8OH$ ), available from E. I. Du Pont de Nemours & Co., Wilmington, Del.; non-ionic esters of ethylene oxide and propylene oxide,

such as *Merpol*<sup>TM</sup> *LFH* (believed to be of the formula  $\text{CH}_3(\text{CH}_2)_n(\text{OC}_2\text{H}_4)_8(\text{OC}_3\text{H}_6)_8\text{OH}$ , where  $n$  is an integer from about 12 to about 16), available from E. I. Du Pont de Nemours & Co., Wilmington, Del., and the like, as well as mixtures thereof. Non-limiting examples of non-ionic fluorinated surfactants include linear perfluorinated polyethoxylated alcohols (e.g., *Zonyl*<sup>TM</sup> *FSN*, *Zonyl*<sup>TM</sup> *FSN-100*, *Zonyl*<sup>TM</sup> *FSO*, and *Zonyl*<sup>TM</sup> *FSO-100* available from DuPont Specialty Chemicals, Wilmington, Del.), fluorinated alkyl polyoxyethylene ethanols (e.g., *Fluorad*<sup>TM</sup> *FC-170C* available from 3M, St. Paul, Minn.), fluorinated alkyl alkoxylate (e.g., *Fluorad*<sup>TM</sup> *FC-171* available from 3M, St. Paul, Minn.), fluorinated alkyl esters (e.g., *Fluorad*<sup>TM</sup> *FC-430*, *FC-431*, and *FC-740* available from 3M, St. Paul, Minn.) and fluorine-substituted alkyl esters and perfluoroalkyl carboxylates (for example, *F-tergent* series manufactured by Neos Co., Ltd., *Lodyne* series manufactured by Ciba-Geigy, *Monflor* series manufactured by ICI, *Surfluon* series manufactured by Asahi Glass Co., Ltd., and *Unidyne* series manufactured by Daikin Industries, Ltd.). Preferred nonionic fluorocarbon surfactants include *Zonyl*<sup>TM</sup> *FSO*, *Fluorad*<sup>TM</sup> *FC-170C*, and *Fluorad*<sup>TM</sup> *FC-171*.

The above mentioned surfactants are added to the ink receiving layers in an amount of from 0.01 to 1.0 g/m<sup>2</sup>, preferably from 0.05 to 0.50 g/m<sup>2</sup>.

Mordants may be incorporated in the ink-receptive layer of the present invention. Such mordants are represented by cationic compounds, monomeric or polymeric, capable of complexing with the dyes used in the ink compositions. Useful examples of such mordants include quaternary ammonium block copolymers, such as *Mirapol A-15* and *Mirapol WT* available from Miranol Incorporated, Dayton, N.J., prepared as disclosed in US Patent 4,157,388, *Mirapol AZ-1* available from Miranol Inc., prepared as disclosed in US Patent 4,719,282, *Mirapol AD-1* available from Miranol Inc., prepared as disclosed in US Patent 4,157,388, *Mirapol 9*, *Mirapol 95*, and *Mirapol 175* available from Miranol Inc., prepared as disclosed in US Patent 4,719,282, and the like. Other suitable mordants comprise diamino alkanes, ammonium quaternary salts (such as polyvinylbenzyl quaternary ammonium salts disclosed in US Patent 4,794,067), and quaternary acrylic copolymer latexes.

Other suitable mordants are fluoro compounds, such as tetra ammonium fluoride hydrate, 2,2,2-trifluoroethylamine hydrochloride (*Aldrich #18,038-6*); 2,2,2-trifluoroethyl-toluene sulfonate (*Aldrich #17,782-2*); 1-( $\alpha,\alpha,\alpha$ -trifluoro-m-tolyl) piperazine hydrochloride, 4-bromo- $\alpha,\alpha,\alpha$ -trifluoro-o-toluidine hydrochloride, 5 difluorophenylhydrazine hydrochloride, 4-fluorobenzylamine hydrochloride, 4-fluoro- $\alpha,\alpha$ -dimethylphenethylamine hydrochloride, 2-fluoroethylamine hydrochloride, 2-fluoro-1-methyl pyridinium-toluene sulfonate, 4-fluorophenethylamine hydrochloride, fluorophenylhydrazine hydrochloride, 1-(2-fluorophenyl) piperazine monohydrochloride, 1-fluoro pyridinium trifluoromethane sulfonate.

10 Further mordants are monoammonium compounds as disclosed, for example, in US Patent 5,320,902, including (A) tetradecyl ammonium bromide (*Fluka 87582*), tetradodecyl ammonium bromide (*Fluka 87249*), tetrahexadecyl ammonium bromide (*Fluka 87298*), tetraoctadecyl ammonium bromide (*Aldrich 35,873-8*), and the like; (B) 2-coco trimethyl ammonium chloride (*Arquad C-33, C-33W, C-50* from Akzo 15 Chemie), palmityl trimethyl ammonium chloride (*Adogen 444* from Sherex Chemicals), myristyl trimethyl ammonium bromide (*Cetrimide BP Triple Crown America*), benzyl tetradecyl dimethyl ammonium chloride (*Arquad DM 14B-90* from Akzo Chemie), didecyl dimethyl ammonium bromide (*Aldrich 29,801-8*), dicetyl dimethyl ammonium chloride (*Adogen 432CG*, Sherex Chemicals), distearyl dimethyl ammonium 20 methyl sulfate (*Varisoft 137, 190-100P* from Sherex Chemicals, *Arosurf TA-100* from Sherex Chemicals), difatty acid isopropyl ester dimethyl ammonium methyl sulfate (*Rewoquat CR 3099* from Rewo Quimica, *Loraquat CR 3099* from Dutton and Reinisch), tallow dimethyl trimethyl propylene diammonium chloride (*Tomah Q-D-T* from Tomah), and N-cetyl, N-ethyl morpholinium ethosulfate (*G-263* from ICI 25 Americas).

Additional mordants are phosphonium compounds, such as, for example, those disclosed in US Patent 5,766,809, including bromomethyl triphenyl phosphonium bromide (*Aldrich 26,915-8*), 3-hydroxy-2-methyl propyl triphenyl phosphonium bromide (*Aldrich 32,507-4*), 2-tetraphenyl phosphonium bromide (*Aldrich 21,878-2*), 30 tetraphenyl phosphonium chloride (*Aldrich 21879-0*), hexadecyl tributyl phosphonium

bromide (*Aldrich* 27,620-0), and stearyl tributyl phosphonium bromide (*Aldrich* 29,303-2).

Additional examples of mordants include those disclosed in US Patents 5,760,809; 5,457,486; 5,314,747; 5,320,902 and 5,441,795.

5       The ink receiving layer can be hardened with a hardener to improve water resistance or dot reproduction. Examples of hardeners include aldehyde compounds such as formaldehyde and glutaraldehyde, ketone compounds such as diacetyl and chloropentanedion, bis(2-chloroethylurea), 2-hydroxy-4,6-dichloro-1,3,5-triazine, reactive halogen-containing compounds disclosed US Patent 3,288,775, carbamoyl pyridinium  
10       compounds in which the pyridine ring carries a sulfate or alkylsulfate group disclosed in US Patents 4,063,952 and 5,529,892, divinylsulfones, reactive olefin-containing compounds disclosed US Patent 3,635,718, N-methylol-derived compounds disclosed in US Patent 2,732,316, isocyanates disclosed in US Patent 3,103,437, aziridine-derived compounds disclosed in US Patents 3,017,280 and 2,983,611, carbodiimides  
15       disclosed in US Patent 3,100,704, epoxy compounds disclosed in US Patent 3,091,537, halogencarboxyaldehydes such as mucochloric acid, dioxane derivatives such as dihydroxy dioxane, and inorganic hardeners such as chromium alum, potash alum and zirconium sulfate. These hardeners can be used singly or in combination. The addition amount of hardener is preferably 0.01 to 10 g, and more preferably 0.1  
20       to 5 g based on 100 g of the binder contained in the ink receiving layer.

      The ink receiving layer may contain a matting agent in an amount of 0.005 to 0.1 g/m<sup>2</sup> to prevent adhesion defects such as blocking. The matting agent can be defined as particles of inorganic or organic materials capable of being discontinuously dispersed in a hydrophilic organic colloid. The inorganic matting agents include ox-  
25       ides such as silicon oxide, titanium oxide, magnesium oxide and aluminum oxide, alkali earth metal salts such as barium sulfate, calcium carbonate, and magnesium sulfate, light-insensitive silver halide particles such as silver chloride and silver bromide (each of which may contain a small amount of iodine), and glass particles. Besides these substances there may be used inorganic matting agents disclosed in DE Patent  
30       2,529,321, in GB Patents 760,775 and 1,260,772, in US Patents 1,201,905,

2,192,241, 3,053,662, 3,062,649, 3,257,296, 3,322,555, 3,353,958, 3,370,951, 3,411,907, 3,437,484, 3,523,022, 3,615,554, 3,635,714, 3,769,020, 4,021,245 and 4,029,504. The organic matting agents include starch, cellulose esters such as cellulose acetate propionate, cellulose ethers such as ethyl cellulose, and synthetic resins.

5 The synthetic resins are water insoluble or sparingly soluble polymers which include a polymer of an alkyl(meth)acrylate, an alkoxyalkyl-(meth)acrylate, a glycidyl(meth)acrylate, a (meth)acrylamide, a vinyl ester such as vinyl acetate and acrylonitrile, an olefin such as ethylene, or styrene and a copolymer of the above described monomers with other monomers such as acrylic acid, methacrylic acid,  $\alpha,\beta$ -unsaturated dicarboxylic acid, hydroxyalkyl(meth)acrylate, sulfoalkyl(meth)acrylate

10 and styrene sulfonic acid. Further, a benzoguanamin-formaldehyde resin, an epoxy resin, nylon, polycarbonates, phenol resins, polyvinyl carbazol or polyvinylidene chloride can be used. Besides the above compounds, there are used organic matting agents disclosed in GB Patent 1,055,713, in US Patents 1,939,213, 2,221,873,

15 2,268,662, 2,322,037, 2,376,005, 2,391,181, 2,701,245, 2,992,101, 3,079,257, 3,262,782, 3,443,946, 3,516,832, 3,539,344,554, 3,591,379, 3,754,924 and 3,767,448, in JP Patents 49-106821/1974 and 57-14835/1982. These matting agents may be used alone or in combination.

The ink-receiving layer of the present invention can also comprise a plasticizer

20 such as ethylene glycol, diethylene glycol, propylene glycol, polyethylene glycol, glycerol monomethylether, glycerol monochlorohydrin, ethylene carbonate, propylene carbonate, tetrachlorophthalic anhydride, tetrabromophthalic anhydride, urea phosphate, triphenylphosphate, glycerol monostearate, propylene glycol monostearate, tetramethylene sulfone, N-methyl-2-pyrrolidone, N-vinyl-2-pyrrolidone, and polymer

25 latices with a low Tg-value such as polyethylacrylate, polymethylacrylate, etc.

The ink receiving layer can comprise biocides. Examples of suitable biocides include (A) nonionic biocides, such as 2-bromo-4'-hydroxyacetophenone (*Busan 90* available from Buckman Laboratories); 3,5-dimethyl tetrahydro-2H-1,3,5-thiadiazine-2-thione (*Slime-Trol RX-28* available from Betz Paper Chem Inc.); a nonionic blend

30 of 5-chloro-2-methyl-4-isothiazoline-3-one, 75% by weight, and 2-methyl-4-isothia-

zolin-3-one, 25% by weight (available as *Amerstat 250* from Drew Industrial Division; *Nalcon 7647* from Nalco Chemical Company; *Kathon LX* from Rohm and Haas Company); and the like, as well as mixtures thereof; (B) anionic biocides, such as anionic potassium N-hydroxymethyl-N-methyl-dithiocarbamate (available as *Busan 40* from Buckman Laboratories Inc.); an anionic blend of methylene bis-thiocyanate, 33% by weight, sodium dimethyl-dithiocarbamate, 33% by weight, and sodium ethylene bisdithiocarbamate, 33% by weight, (available as *Amerstat 282* from Drew Industrial Division; *AMA-131* from Vinings Chemical Company); sodium dichlorophene (*G-4-40* available from Givaudan Corporation); and the like, as well as mixtures thereof; (C) cationic biocides, such as poly(oxyethylene (dimethylamino)ethylene (dimethylamino) ethylene dichloride) (*Busan 77* available from Buckman Laboratories Inc.); a cationic blend of bis(trichloromethyl) sulfone and quaternary ammonium chloride (available as *Slime-Trol RX-36 DPB865* from Betz Paper Chem. Inc.); and the like, as well as mixtures thereof. The biocide can be present in any effective amount; typically, the biocide is present in an amount of from 0.1 to 3% by weight of the coating composition, although the amount can be outside this range.

The ink receiving layer of the invention may further contain various conventional additives such as colorants, colored pigments, pigment dispersants, lubricants, permeating agents, fixing agents for ink dyes, UV absorbers, anti-oxidants, dispersing agents, anti-foaming agents, leveling agents, fluidity improving agents, antiseptic agents, brightening agents, viscosity stabilizing and/or enhancing agents, pH adjusting agents, anti-mildew agents, anti-fungal agents, moisture-proofing agents, paper stiffness increasing agents and anti-static agents.

The above-mentioned various additives can be added ordinarily in a range of 0 to 10% by weight of the solid content of the ink receiving layer composition.

As a coating method of an ink receiving layer coating solution, any conventional coating method (for example, a curtain method, an extrusion method, an air-knife method, a slide coating, a roll coating method, reverse roll coating, solvent extrusion, dip coating processes and a rod bar coating method) can be used.

The ink-receiving layer of the present invention is preferably coated on one side of the support as a plurality of at least two distinct layers, coated from different coating solutions. Most preferably, the ink-receiving layer of the present invention is coated on one side of the support as a plurality of three distinct layers, coated from different coating solutions. When preparing an ink-jet receiving sheet according to this invention, by coating two or more ink-receiving layers onto a support, it is possible to prepare an ink-receiving sheet with excellent properties, especially with respect to glossiness and post printed drop sweating after stressed ageing.

The ink jet receiving sheet of the invention has a surface pH value lower than 5.0, preferably in the range from 3.5 to 4.5. At surface pH values lower than 5 good glossiness, defined as the quantity of reflected light measured at a predetermined angle (generally at 20°, 60° or 85°) with respect to the direction of the incident light and expressed in percentage, can be noted.

Specific embodiments of the invention will now be described in detail. The following examples are intended to be illustrative, and the invention is not limited to the materials, conditions, or process parameters set forth in these embodiments. All parts and percentages are by weight unless otherwise indicated.

## EXAMPLES

### Example 1.

#### Sample 1 (reference).

A receiving ink jet sheet was prepared using a support comprising a paper base having a weight of 170 g/m<sup>2</sup> on which a resin portion having a weight of 25 g/m<sup>2</sup> of low density polyethylene was coated on both sides. A gelatin primer was coated on the front side and an anticurl gelatin layer was coated on the back side.

Three coating solutions were prepared using the components indicated below dissolved in water. The solutions were adjusted to pH 4.0 using sulfuric acid before



coating them all at once with extrusion system at 10.6 meter by minute on the front side of the aforementioned support.

The resulting coating was dried to give a multilayer inkjet receiving sheet with the following composition:

5 First layer: 2.89 g/m<sup>2</sup> of gelatin; 0.47g/m<sup>2</sup> of Glucidex-19, a polysaccharide available from Roquette, and 0.06 g/m<sup>2</sup> of Triton X 100;

Second layer: 2.74 g/m<sup>2</sup> of gelatin, 1.58 g/m<sup>2</sup> of PVP-K 90, 0.44 g/m<sup>2</sup> of Glucidex-19, 0.06 g/m<sup>2</sup> of Triton X 100, and 0.08 g/m<sup>2</sup> of fine particles of aluminum oxide;

10 Third layer: 0.47 g/m<sup>2</sup> of gelatin, 0.23 g/m<sup>2</sup> of PVP-K 90, 0.08 g/m<sup>2</sup> of Glucidex-19, 0.07 g/m<sup>2</sup> of Zonyl FSN 100, 0.06 g/m<sup>2</sup> of P.M.M.A. and 0.04 g/m<sup>2</sup> of cross-linking agent H-1.

Sample 2 (invention).

15 The procedure of sample 1 was repeated with the same ingredients, except that 0.075 g/m<sup>2</sup> of Ca(NO<sub>3</sub>)<sub>2</sub>.4H<sub>2</sub>O (corresponding to 0.32 millimole/m<sup>2</sup> of Calcium<sup>++</sup>) were added both to the first and second layer.

Sample 3 (invention).

20 The procedure of sample 1 was repeated with the same ingredients, except that 0.150 g/m<sup>2</sup> of Ca(NO<sub>3</sub>)<sub>2</sub>.4H<sub>2</sub>O (corresponding to 0.64 millimole/m<sup>2</sup> of Calcium<sup>++</sup>) were added both to the first and second layer.

Sample 4 (invention).

25 The procedure of sample 1 was repeated with the same ingredients, except that 0.300 g/m<sup>2</sup> of Ca(NO<sub>3</sub>)<sub>2</sub>.4H<sub>2</sub>O (corresponding to 1.28 millimole/m<sup>2</sup> of Calcium<sup>++</sup>) were added both to the first and second layer.

Sample 5 (reference).

The procedure of sample 1 was repeated with the same ingredients, except that nitric acid rather than sulfuric acid was used to adjust the coating solutions to pH 4.0.

5           Sample 6 (invention).

The procedure of sample 5 was repeated with the same ingredients, except that 0.150 g/m<sup>2</sup> of Ca(NO<sub>3</sub>)<sub>2</sub>·4H<sub>2</sub>O (corresponding to 0.64 millimole/m<sup>2</sup> of Calcium<sup>++</sup>) were added to both the first and second layer.

10           Sample 7 (invention).

The procedure of sample 5 was repeated with the same ingredients, except that 0.300 g/m<sup>2</sup> of Ca(NO<sub>3</sub>)<sub>2</sub>·4H<sub>2</sub>O (corresponding to 1.28 millimole/m<sup>2</sup> of Calcium<sup>++</sup>) were added to both the first and second layer.

15           Sample 8 (invention).

The procedure of sample 5 was repeated with the same ingredients, except that 0.162 g/m<sup>2</sup> of MgSO<sub>4</sub>·7H<sub>2</sub>O (corresponding to 0.66 millimole/m<sup>2</sup> of Magnesium<sup>++</sup>) were added to both the first and second layer.

20           Sample 9 (invention).

The procedure of sample 5 was repeated with the same ingredients, except that 0.187 g/m<sup>2</sup> of ZnSO<sub>4</sub>·7H<sub>2</sub>O (corresponding to 0.65 millimole/m<sup>2</sup> of Zinc<sup>++</sup>) were added to both the first and second layer.

25           Sample 10 (invention).

The procedure of sample 5 was repeated with the same ingredients, except that 0.159 g/m<sup>2</sup> of BaCl<sub>2</sub>·2H<sub>2</sub>O (corresponding to 0.65 millimole/m<sup>2</sup> of Barium<sup>++</sup>) were added to both the first and second layer.

Sample 11 (comparison).

The procedure of sample 5 was repeated with the same ingredients, except that 0.162 g/m<sup>2</sup> of La(NO<sub>3</sub>)<sub>3</sub>·4H<sub>2</sub>O (corresponding to 0.65 millimole/m<sup>2</sup> of Lanthanum<sup>+++</sup>) were added to both the first and second layer.

5

Sample 12 (Comparison).

The procedure of sample 7 was repeated with the same ingredients, except that the solution was adjusted to pH 5.0 using nitric acid.

10

Sample 13 (Comparison).

The procedure of sample 7 was repeated with the same ingredients, except that the solution was adjusted to pH 5.5 using nitric acid.


An evaluation image pattern was printed on samples 1 to 13 using a Stylus  
15 Photo 700 color ink jet printer (produced by Epson). The black density was generated using a dye and the ink was uniformly jetted at maximum ink jetting amount possibility of the printer. The obtained printed samples were submitted to sweating evaluation, measured both on fresh samples and to samples submitted to accelerated ageing, at 22°C and 75% relative humidity for two hours. The printed surface was inspected  
20 to detect the presence of organic drop sweating. For each evaluation, a ranking score was given from 1 to 10, wherein 10 means "Surface completely free of sweating drops" and 1 means "Very high level of sweating drops observed". The glossiness was measured on unprinted samples at an angle of 60° with a TRI-Microgloss-160 (Produced by Sheen) as disclosed in ASTM standard No. 523. The results are shown  
25 in Table 1.




As we can see from table 1, Samples 2 to 4 and Samples 6 to 10 of the present invention, containing salts of metal selected from the IIA or IIB groups of the periodic table of elements, show a significant reduction of the problem of post printed drop sweating after stressed ageing, while reference Samples 1 and 5, not containing said metallic salts, show bad values after aging.

Comparison Sample 11, containing Lanthanum <sup>+++</sup> salt, exhibits bad sweating values. Comparison Samples 12 and 13, being equal to sample 7 but with higher values of surface pH (5.0 and 5.5, respectively), exhibit bad glossiness values.

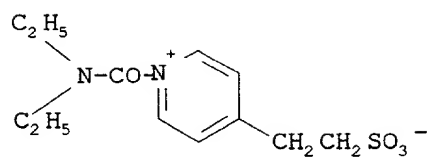
Triton<sup>TM</sup> X-100 is the trade name of a non-ionic surfactant of the alkylphenoxyethylene type having a dynamic surface tension of 32 dyne/cm<sup>2</sup>, a HLB value of 13.5 and corresponding to the following formula:



Zonyl<sup>TM</sup> FSN 100 is the trade name of a non-ionic surfactant of the perfluoroalkylpolyoxyethylene type, manufactured by DuPont having a dynamic surface tension of 26 dyne/cm<sup>2</sup>, a HLB value in the range 10-13 and corresponding to the following formula:



Hardening agent H-1 is a pyridinium derivative having the following formula:



Glucidex-19™ is the trade names of a polysaccharide available from Roquette Freres S.A., Lille, France.

5 PVP-K 90 is a polyvinylpyrrolidone available from Fluka.

## **Ink-Jet Printing Receiving Sheet Comprising Gelatin And A Metal Salt**

### **CLAIMS**

- 5           1.       An ink jet receiving sheet comprising a support and at least an ink receiving layer containing a binder selected from the group consisting of gelatin and gelatin derivatives, characterized in that said receiving layer comprises at least a salt of a metal selected from the IIA or IIB groups of the periodic table of elements or complexes which comprise said metal salts and in that said receiving sheet has a surface pH value lower than 5.0.
- 10           2.       The ink jet receiving sheet according to claim 1, characterized in that said receiving layers totally comprise a gelatin amount ranging from 1 to 20 g/m<sup>2</sup>.
- 15           3.       The ink jet receiving sheet according to claim 1, characterized in that said metal is selected from the group consisting of calcium, magnesium, zinc and barium.
- 20           4.       The ink jet receiving sheet according to claim 1, characterized in that said metal salt is an inorganic salt.
- 25           5.       The ink jet receiving sheet according to claim 1, characterized in that said metal salt is selected from the group consisting of magnesium sulfate, magnesium nitrate, calcium sulfate, calcium nitrate, zinc sulfate, zinc nitrate and barium chloride.
6.       The ink jet receiving sheet according to claim 1, characterized in that said receiving layers totally comprise an amount of said metal salt in the range from 0.05 to 2.0 g/m<sup>2</sup>.

7. The ink jet receiving sheet according to claim 1, characterized in that said receiving layers totally comprise a ratio of gelatin to metal salt in the range from 2:1 to 200:1.
- 5 8. The ink jet receiving sheet according to claim 1, characterized in that said receiving layers comprise at least one saccharide selected from the group consisting of monosaccharides, oligosaccharides, and polysaccharides.
- 10 9. The ink jet receiving sheet according to claim 1, characterized in that said receiving sheet comprises at least two ink receiving layers coated on the same side of the support, and in that both ink receiving layers nearest to the support each comprise a metal salt amount ranging from 0.025 to 1 g/m<sup>2</sup>.



## ABSTRACT OF DISCLOSURE

### **Ink-Jet Printing Receiving Sheet Comprising Gelatin And A Metal Salt**

The present invention refers to an ink jet receiving sheet having a surface pH  
5 value lower than 5.0 and comprising a support and at least a receiving layer contain-  
ing a binder selected from the group consisting of gelatin and gelatin derivatives and  
at least a salt of a metal selected from the IIA and IIB groups of the periodic table of  
elements or complexes which comprise said metal salts.

The ink jet receiving sheet of the invention provides minimum post printed  
10 drop sweating after stressed ageing in the resulting image, still maintaining a good  
glossiness.

03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 262

**Declaration and Power of Attorney For Patent Application**  
***Modulo di Dichiarazione Per Domanda di Brevetto***  
**Italian Language Declaration**

Io, sottoscritto inventore, dichiaro con il presente che:

Il mio domicilio, recapito postale e cittadinanza sono quelli indicati in calce accanto al mio nome,

Che mi reputo in buona fede essere l'inventore originario, primo e unico (qualora un solo nominativo appaia elencato appresso) o il coinventore (qualora i nominativi siano più di uno) primo e originario dell'invenzione da me rivendicata, e per la quale faccio domanda di brevetto. Tale invenzione è intitolata

**"FOGLIO RECETTORE PER STAMPA A GETTO DI INCHIOSTRO COMPRENDENTE GELATINA E UN SALE METALLICO"**

e la sua descrizione è:

(contrassegnare uno dei due)

☒

qui acclusa.

☐

E' stata presentata il \_\_\_\_\_

Come Domanda Numero \_\_\_\_\_

ed è stata rettificata il \_\_\_\_\_  
(se applicabile)

Dichiaro inoltre con il presente di aver letto e compreso il contenuto della specificazione sopra indicata, comprese le rivendicazioni, come rettificata da qualsiasi emendamento a cui si sia accennato sopra.

Riconosco il mio dovere di rivelare informazioni che costituiscano materiale per l'esame della presente domanda secondo i termini del Titolo 37, Codice dei Regolamenti Federali, Comma 1,56(a).

As e below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**"INK-JET PRINTING RECEIVING SHEET COMPRISING GELATIN AND A METAL SALT"**

the specification of which

(check one)

☒

is attached hereto.

☐

was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

## Italian Language Declaration

Con il presente rivendico i benefici di priorità per l'estero come stabilito dal Titolo 35, Codice degli Stati Uniti, Comma 119, per qualsiasi domanda di brevetto (o brevetti) straniera o per qualsiasi certificato d'invenzione sotto elencato, ed ho anche elencato qui sotto tutte le domande di brevetto e certificati di invenzione stranieri aventi una data di deposito anteriore a quella della domanda per la quale si rivendica la priorità:

Prior foreign applications  
Domande estere di priorità

SV99A000029                      ITALY                      3 September 1999  
(Number)                      (Country)                      (Day/Month/Year Filed)  
(Numero)                      (Paese)                      (Giorno, Mese ed Anno di Deposito)

(Number)                      (Country)                      (Day/Month/Year Filed)  
(Numero)                      (Paese)                      (Giorno, Mese ed Anno di Deposito)

(Number)                      (Country)                      (Day/Month/Year Filed)  
(Numero)                      (Paese)                      (Giorno, Mese ed Anno di Deposito)

Priority claimed  
Priorità rivendicata

☒                      ☐

Yes                      No  
Si                      No

☐                      ☐

Yes                      No  
Si                      No

☐                      ☐

Yes                      No  
Si                      No

Con il presente rivendico il beneficio previsto dal Titolo 35, Codice degli Stati Uniti, Comma 120, per qualsiasi domanda (o domande) di brevetto sotto indicata, ed entro i limiti nei quali il materiale indicato in ciascuna delle domande di brevetto non è stato rivelato nella precedente domanda di brevetto americana nel modo previsto dal primo paragrafo del titolo 35, Codice degli Stati Uniti, Comma 112, riconosco il mio dovere di rivelare il materiale di informazione, così come viene definito nel titolo 37, Codice dei Regolamenti Federali, Comma 1.56(a), che possa essere venuto ad aggiungersi nel periodo intercorso tra la data di deposito della domanda di priorità e la data nazionale o internazionale PCT di deposito di questa domanda:

(Application Serial No.)                      (Filing Date)  
(Numero di serie della                      (Data di  
Domanda di Brevetto)                      deposito)

(Application Serial No.)                      (Filing Date)  
(Numero di serie della                      (Data di  
Domanda di Brevetto)                      deposito)

Dichiaro inoltre con il presente che tutte le informazioni da me fornite sono in fede mia vere, e che tutte le affermazioni da me fatte sono in fede mia vere; dichiaro inoltre che quando ho fatto queste affermazioni ero al corrente del fatto che false dichiarazioni fatte intenzionalmente sono punibili con multa o incarcerazione, o ambedue, secondo quanto stabilito dalla sezione 1001 del Titolo 18 del Codice degli Stati Uniti, e che tali informazioni intenzionalmente false possono mettere a repentaglio la validità della domanda di brevetto rilasciata in base ad esse.

I hereby claim foreign priority benefits under title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Stato Giuridico)                      (Status)  
(Brevettato, in attesa                      (patented, pending  
di Brevetto, Abbandonato)                      abandoned)

(Stato Giuridico)                      (Status)  
(Brevettato, in attesa                      (patented, pending  
di Brevetto, Abbandonato)                      abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## Italian Language Declaration

PROCURA: Io, sottoscritto inventore, nomino con la presente il seguente Procuratore (o Procuratori) o Agente (Agenti) che si incarica di perseguire questa pratica e di portare a termine tutte le operazioni necessarie all'Ufficio Brevetti e all'Ufficio Marchi di Fabbrica pertinenti a questa pratica (*Elencare il Nome e il Numero di Matricola*)



POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*list name and registration number*)

Recapito per la Corrispondenza

Send correspondence to:

Telefonare a: (*Nome e Numero*)

Direct Telephone Calls to (*name and telephone number*)

Nome Completo dell'inventore primo e unico		Full name of sole or first inventor	
Alain Dominique SISONDI			
Firma dell'inventore	Date	Inventor's signature	Date
	July, 27, 2000		
Residenza 23, Route d'Aspremont Nice, France		Residence	
Cittadinanza French		Citizenship	
Recapito o Casella Postale Ferrania S.p.A.		Post Office Address	
I-17014 Cairo Montenotte/Ferrania (Savona), Italy			
Nome Completo del secondo coinventore, se applicabile		Full name of second joint inventor, if any	
Giuseppe LOVIGLIO			
Firma del secondo inventore	Date	Second inventor's signature	Date
	07/27/2000		
Residenza via Bourniquez, 2/14 I-17100 Savona, Italy		Residence	
Cittadinanza Italian		Citizenship	
Recapito o Casella Postale Ferrania S.p.A.		Post Office address	
I-17014 Cairo Montenotte/Ferrania (Savona), Italy			

(Si prega di fornire le stesse informazioni e firme di eventuali terzi e più coinventori)

(Supply similar information and signature for third and subsequent joint inventors)

## Italian Language Declaration

PROCURA: Io, sottoscritto inventore, nomino con la presente il seguente Procuratore (o Procuratori) o Agente (Agenti) che si incarica di perseguire questa pratica e di portare a termine tutte le operazioni necessarie all'Ufficio Brevetti e all'Ufficio Marchi di Fabbrica pertinenti a questa pratica (*Elencare il Nome e il Numero di Matricola*)



POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*list name and registration number*)

Recapito per la Corrispondenza

Send correspondence to:

Telefonare a: (*Nome e Numero*)

Direct Telephone Calls to (*name and telephone number*)

Nome Completo dell'inventore primo e unico		Full name of sole or first inventor	
Marco SERAFINI			
Firma dell'inventore	Data	Inventor's signature	Date
	7-27-2000		
Residenza via Gramsci, 23 I-17016 Ferrania (Savona), Italy		Residence	
Cittadinanza Italian		Citizenship	
Recapito o Casella Postale Ferrania S.p.A. I-17014 Cairo Montenotte/Ferrania (Savona), Italy		Post Office Address	
Nome Completo del secondo coinventore, se applicabile		Full name of second joint inventor, if any	
Pierfiore MALFATTO			
Firma del secondo inventore	Data	Second inventor's signature	Date
	7-26-2000		
Residenza Località Prasottano, 6/5 I-17016 Ferrania (Savona), Italy		Residence	
Cittadinanza Italian		Citizenship	
Recapito o Casella Postale Ferrania S.p.A. I-17014 Cairo Montenotte/Ferrania (Savona), Italy		Post Office address	

(Si prega di fornire le stesse informazioni e firme di eventuali terzi e più coinventori)

(Supply similar information and signature for third and subsequent joint inventors)

## Italian Language Declaration

PROCURA: Io, sottoscritto inventore, nomino con la presente il seguente Procuratore (o Procuratori) o Agente (Agenti) che si incarica di perseguire questa pratica e di portare a termine tutte le operazioni necessarie all'Ufficio Brevetti e all'Ufficio Marchi di Fabbrica pertinenti a questa pratica (*Elencare il Nome e il Numero di Matricola*)


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (*list name and registration number*)

Recapito per la Corrispondenza

Send correspondence to:

Telefonare a: (*Nome e Numero*)

Direct Telephone Calls to (*name and telephone number*)

Nome Completo dell'inventore primo e unico		Full name of sole or first inventor	
Diego BRIGNONE			
Firma dell'inventore	Data	Inventor's signature	Date
	7-31-00		
Residenza via Colletto, 92 I-1710 Rocchetta di Cairo (Savona), Italy		Residence	
Cittadinanza Italian		Citizenship	
Recapito o Casella Postale Ferrania S.p.A.		Post Office Address	
I-17014 Cairo Montenotte/Ferrania (Savona), Italy			
Nome Completo del secondo coinventore, se applicabile		Full name of second joint inventor, if any	
Firma del secondo inventore	Data	Second inventor's signature	Date
Residenza		Residence	
Cittadinanza		Citizenship	
Recapito o Casella Postale		Post Office address	

(Si prega di fornire le stesse informazioni e firme di eventuali terzi e più coinventori)

(Supply similar information and signature for third and subsequent joint inventors)